



Table Base Assembly Instructions

Braga & Faro Series




Scan for help

Suggested Tools

- Adjustable Wrench or
- 3/4 Socket Wrench
- Safety Glasses

1. Make sure you have all the pieces shown on your order's packing list. Contact Tablebases.com if any pieces are missing. Assembly is easiest with two people.
2. Carefully place your column on a soft surface (blanket or carpet), mounting plate down. Unscrew the included bolt and lockwasher from the column.
3. Carefully flip the base bottom upside down, and center it on top of the column so that the hole in the base lines up with the hole in the column*. Balance the base on top of the column with the leveling glides facing up.
4. Place the included lockwasher over the hole in the base bottom, and put the bolt through the hole in the base and into the threaded hole in the column.
5. Fully tighten the bolt using your wrench, making sure to apply plenty of pressure so that the bolt is properly seated. Take care not to cross-thread the bolt. If it does not screw in easily, turn it counter clockwise until you feel a click, then retry tightening the bolt.

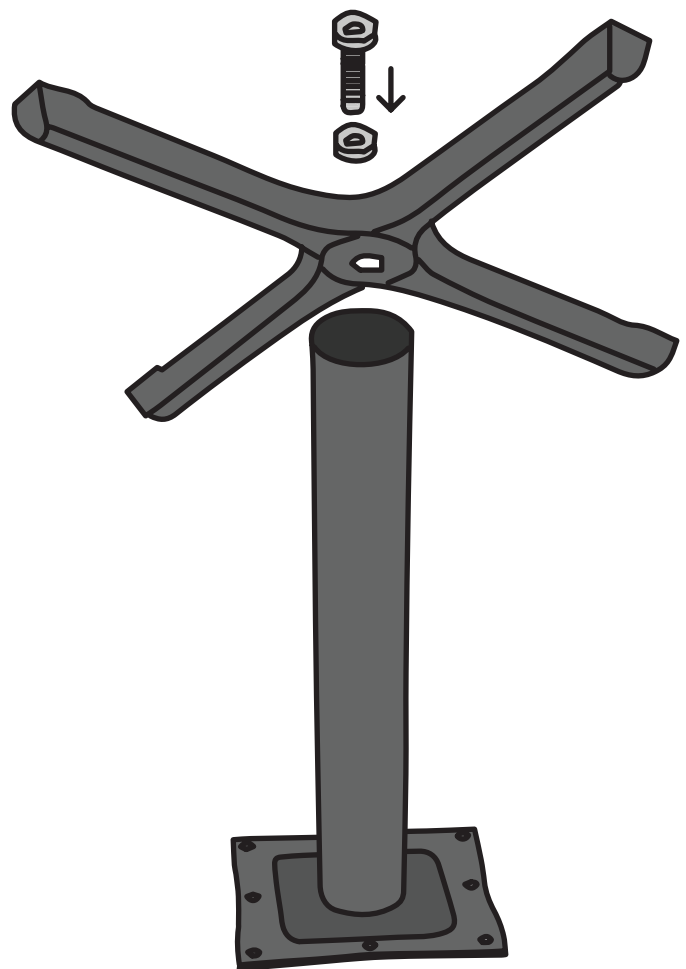

*While the base is upside down, it will be very top heavy, especially with bar height models. Use caution not to tip over the base. Two people are recommended for assembly, so that one person can steady the base. If preferred, you can also assemble the base right-side up by placing the base bottom on top of two blocks, so that the underside of the base is free for you to tighten the assembly hardware.

Contact Tablebases.com Customer Service for Assistance
1-800-258-2320 | Support@Tablebases.com

©2023 Tablebases.com