



Table Base Assembly Instructions

Top & Bottom Bolts Method



Scan for help

Suggested Tools

- Allen Wrench Set
- Safety Glasses
- Optional: Non-Permanent Epoxy

1. Make sure you have all the pieces shown on your order's packing list. Contact Tablebases.com if any pieces are missing. Assembly is easier with two people, especially for larger models.


2. Place your base bottom on two blocks so that the top and bottom are accessible. Alternatively, you can have another person help steady the base while you assemble it upside down*.

3. Place the column on the center of the base bottom and line up the threaded holes in the column with the holes in the base**.

4. Start by inserting one bolt and threading it in half way***. Then turn the column so the remaining holes line up with the base, and thread in the remaining bolts.

5. Use an allen wrench to fully tighten the bolt making sure to apply plenty of pressure so that the bolt is properly seated. Take care not to cross-thread the bolt. If it does not screw in easily, turn it counter clockwise until you feel a click, then retry tightening the bolt.

*When assembling upside down, start by securing the mounting plate to the column. Then flip the column over so that the mounting plate sits on the floor. Line up the base bottom on the column, insert the bolts, and securely tighten. Take care as upside down bases are top heavy and can be a tipping hazard.
**Different models or stock batches may use a different number of bolts.
***Optionally, for very heavy duty or commercial applications, you can coat the bolts in a small amount of NON-permanent epoxy to help them stay in place over time. DO NOT USE PERMANENT EPOXY.

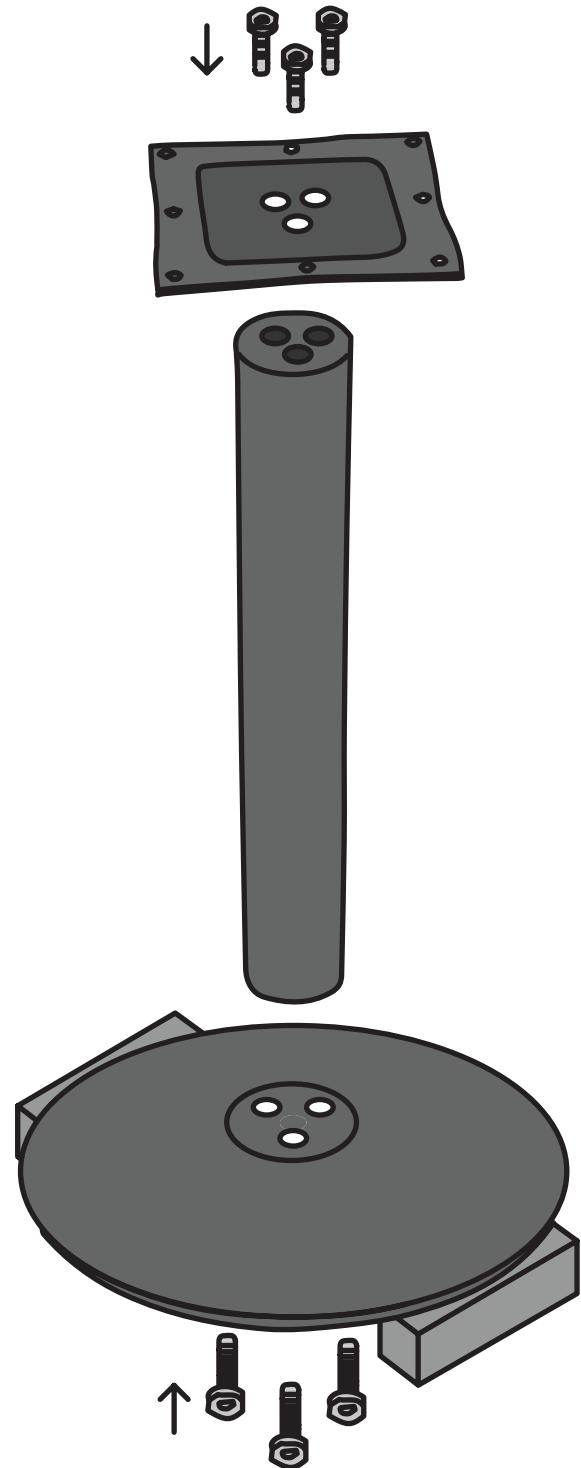

Contact Tablebases.com Customer Service for Assistance
1-800-258-2320 | Support@Tablebases.com