

TABLE BASE ASSEMBLY Steel Powder Coated - Outdoor Round Style Bases

For: 4000BKZ Positano Line With Round Column See Catalog for Top Size Recommendations



Part List:

- A Base Plate
- **B** Connecting Rod
- **B-1 -** (x2) M12 Hex Nut
- **B-2 -** Lock Washer **B-3 -** Flat Washer
- **C** Column
- **D** Top Plate
- **7 -** TOP Plate (v2) Mounting Ali
- E (x2) Mounting Alignment Plates
- **F** (x4) M10 Flat Head Screws **G** - Hex Key

Instructions:

- Step 1 Mount the alignment plate (E) on top of the base plate (A) with 2 screws (F) using the hex key (G). Make sure these screws are tight.
- Step 2 Thread the connecting rod (B) into the center hole of the base plate making sure it comes through the bottom of the base plate approximately 1/4 inch.
- Step 3 Tighten the hex nut (B-1) on top of the alignment plate. Step 4 - Slide the round column (C) over the connecting rod
- pressing it down onto the notches of the alignment plate. **Step 5** - Mount the second alignment plate (E) on the top plate (D) with 2 screws (F) using the hex key (G). Make sure these screws are tight.
- Step 6 Place the top plate assembly (D) on top of the column assembly (C) making sure the threaded rod (B) comes through the center hole. Press the alignment plate (E) into the notches of the top of the column (C). Make sure the threaded rod is not higher than the top surface of the top plate. Place the flat washer (B-3), Lock washer (B-2) and hex nut (B-1) on the threaded rod and tighten with a 19mm wrench.


You are now ready to mount your table top!





TABLE BASE ASSEMBLY Steel Powder Coated - Outdoor Square Style Bases

For: 5000BKZ Positano Line With Square Column See Catalog for Top Size Recommendations

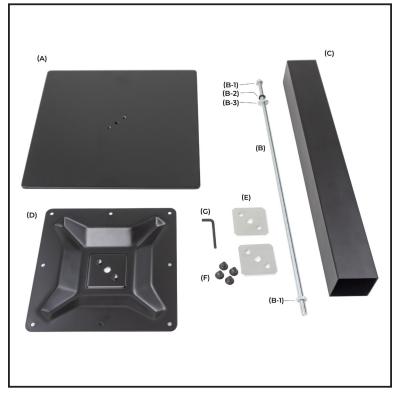

Part List:

- A Base Plate
- **B** Connecting Rod
- **B-1 -** (x2) M12 Hex Nut **B-2 -** Lock Washer
- **B-2 -** Lock Washe **B-3 -** Flat Washer
- **C** Column
- **D** Top Plate
- **E** (x2) Mounting Alignment Plates
- \mathbf{F} (x4) M10 Flat Head Screws
- **G** Hex Key

Instructions:

- Step 1 Mount the square alignment plate (E) on top of the base plate (A) with 2 screws (F) using the hex key (G). Make sure these screws are tight.
- Step 2 Thread the connecting rod (B) into the center hole of the base plate making sure it comes through the bottom of the base plate approximately 1/4 inch.
- Step 3 Tighten the hex nut (B-1) on top of the alignment plate. Step 4 - Slide the square column (C) over the connecting rod
- pressing it down onto the square alignment plate. Step 5 - Mount the second alignment plate (E) on the top plate (D) with 2 screws (F) using the hex key (G). Make sure these screws are tight.
- Step 6 Place the top plate assembly (D) on top of the column assembly (C) making sure the threaded rod (B) comes through the center hole. Press the square alignment plate (E) into the top of the column (C). Make sure the threaded rod is not higher than the top surface of the top plate. Place the flat washer (B-3), Lock washer (B-2) and hex nut (B-1) on the threaded rod and tighten with a 19mm wrench.

You are now ready to mount your table top!

